



Mod. 1525 - 1525 VR -1535

APPLICATION

Vapor recovery adaptor are device in according with Directive 2014/34/EU and harmonized standard. They are designed to minimize pressure drop and maximize the efficiency of the recovery of vapors during tanker loading and unloading.


It can be ordered in different sizes to meet any requirement.

CHEMICAL SUITABILITY

- Standard model is for traditional fuel without additives and chemically compatible products.


PART	1525-00	1525 VR	1535	
BODY	ALUMINIUM	ALUMINIUM	ALUMINIUM	
SCREWS, SPRING & BOLTS	-	STAINLESS STEEL		
POPPET	-	STAINLESS STEEL		
GASKET/0-RING	-	VITON®	VITON®	

CODE	1525-00	1525VR-00	1525VR-10	1525VR-20	1535-00
DN1	4" CAMLOCK M	4" CAMLOCK M	4" CAMLOCK M	4" CAMLOCK M	3" CAMLOCK M
DN2	2" M BSPP	4" F BSPP	3" F BSPP	2" F BSPP	3" F BSPP
A (mm)	77	148	148	148	203

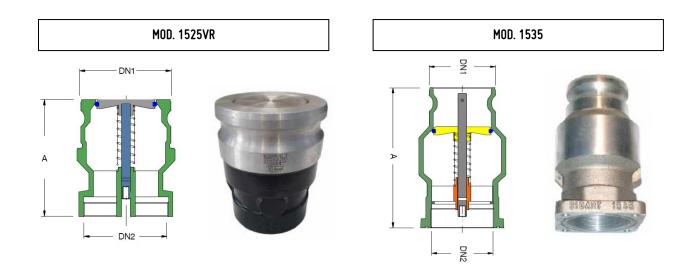

RIDART s.r.l. via Adua, 17 – 21045 Gazzada Schianno (VA) ITALY P.IVA/C.F. IT 01454770122 www.ridart.it info@ridart.it +39 0332 463301 Product Certification, Declaration of Conformity, User Manual and Testing on: www.ridart.it/support The Data and Images are not binding. We reserve the right to make changes without notice. Pressure & Flow Tolerances ±20%.



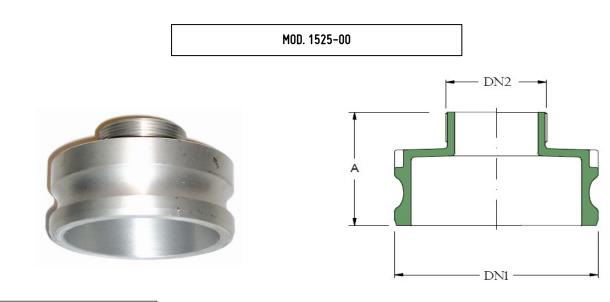

INSTALLATION

- For correct installation follow the Directives and product User Manual.
- Contact our technical department for custom application or maintenance by email to: **<u>quality@ridart.it.</u>**
- Product Certification, Declaration of Conformity and User Manuals are available on **www.ridart.it/support.**

MAINTENANCE

- Always replace the product after fire or deflagration.
- In case of tampering warranty expires and safety protection is not guaranteed.

YOU MAY ALSO BE INTERESTED IN:

CODE	DESCRIPTION	
1534-00	Vapor recovery adaptor 3" cam-lock M x 3"F BSPP with flame arrester	
1520-00	Vapor Recovery Coupler 4" cam-lock F x 2"1/2F + 3"M BSPP	
090850-1 OT	Brass Female Square Flange 3"	\bigcirc